



PRESSURE TANK

Features:

- ◆ NSF Standard 61, IAPMO R&T UPC approved
- ◆ Polypropylene liner ensures long durability
- ◆ Butyl diaphragm assure long life and safety
- ◆ Highly rust resistant durable baked epoxy coating finish
- ◆ Cast stainless steel water connection
- ◆ -ring sealed air valve cap
- ◆ 100% pressure tested
- ◆ No maintenance

www.apecpump.com


CE

ISO 9001:2008



PRESSURE TANK

Pressure water tanks are suited for all water systems: industrial, domestic and agricultural. The tanks are constructed of a polypropylene liner combined with high grade butyl diaphragm to isolate water and air. This provides a closed system for drinking water preventing the growth of bacteria and vermin intrusion. The cast stainless steel water connection is used for corrosion resistance. All tanks are quality tested to ensure the structural integrity of every tank.

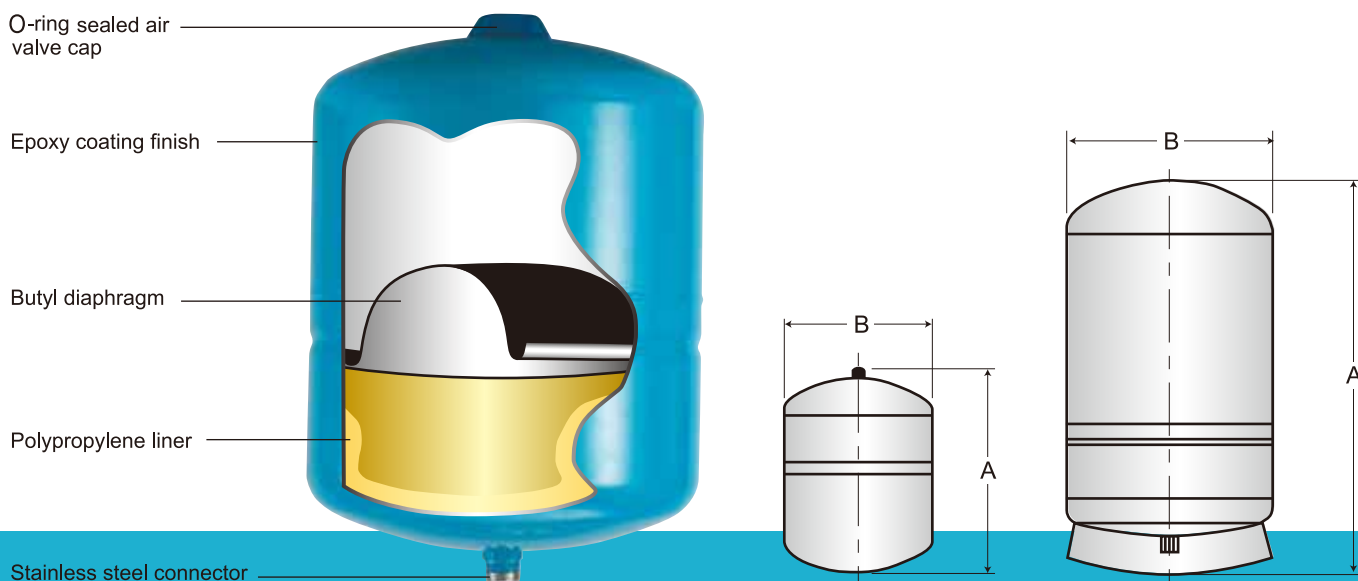

VERTICAL TYPE

Model	Total Tank Volume		Connection (BSP / BSPT/NPT)	Accept Volume		Diameter (B)		Height (A) (Base Including)		Box Length		Box Width		Box Height		N.W.		Shipping Volume CUF
	Liter	Gal		Liter	Gal	cm	Inch	cm	Inch	cm	Inch	cm	Inch	cm	Inch	Kg	Lbs.	
SPTB-003	3	0.5	1" BSP/ BSPT/ NPT OR 3/4" BSP/ NPT	1	0.25	13	5.1	21.5	8.6	60	23.6	45	17.7	24	9.45	13.8	30.4	2.29
SPTB-008	8	2		3.5	0.9	20.3	8	29	11.4	21.5	8.46	21.5	8.46	31.5	12.4	2.3	5.1	0.52
SPTB-012	12	3.2		6	1.6	23	9.3	39	15.4	23.5	9.25	23.5	9.25	39.5	15.55	3	6.6	0.75
SPTB-018	18	4.5		9.5	2.5	28	11	39	15.4	28.5	11.22	28.5	11.22	39.5	15.55	3.5	7.7	1.13
SPTB-024	24	6		11.5	3	29.5	11.6	41.5	16.3	30	11.81	30	11.81	43	16.93	4.2	9.2	1.37
SPTB-038	38	10		20	5.2	29.5	11.6	55	21.7	30	11.81	30	11.81	57	22.44	6	13.2	1.81
SPTB-058	58	14		42.8	11.3	38.1	15	63	24.8	41	16.14	41	16.14	64	25.2	9	19.8	3.8
SPTB-080	80	20		50	13	38.1	15	78	30.7	41	16.14	41	16.14	79	31.1	12.2	26.8	4.7
SPTB-100	100	28		58.5	15	38.1	15	99.5	39.2	41	16.14	41	16.14	101	39.76	15	33	6
SPTB-130	130	34		85.6	22.5	55.9	22	75	29.5	56	22.05	56	22.05	76	29.92	20.8	45.8	8.42
SPTB-160	160	44	1-1/4" BSP/ BSPT/ NPT	115	30	55.9	22	91.5	36	56	22.05	56	22.05	92	36.22	24.1	53	10.2
SPTB-235	235	62		140	35.2	55.9	22	116	45.6	56	22.05	56	22.05	118	46.46	34.9	76.8	13.1
SPTB-305	305	81		167	44	55.9	22	145	57.2	56	22.05	56	22.05	147	57.87	44.8	98.6	16.3

HORIZONTAL TYPE

Model	Tank Volume		Connection (BSP / BSPT/NPT)	Diameter		Height		Length		Box Length		Box Width		Box Height		N.W.		Shipping Volume CUF
	Liter	Gal		cm	Inch	cm	Inch	cm	inch	cm	inch	cm	inch	cm	inch	Kg	Lbs.	
SPTB-018H	18	4.5	1" BSP/ BSPT/ NPT OR 3/4" BSP/ NPT	28	11	30	12	39	15.4	39.5	15.6	29	11.4	32.5	12.8	4.6	10.1	1.32
SPTB-024H	24	6		29.5	11.6	32	12.6	41.5	16.3	43	17	30	12	34	13.4	5.5	12.1	1.55
SPTB-038H	38	10		29.5	11.6	32	12.6	55	21.7	60	23.6	30	12	35	13.4	7.3	16.1	2.23
SPTB-058H	58	14		38.1	15	42.5	17	53	22	54	21.3	40	15.7	45	17.3	11	24.2	3.43
SPTB-080H	80	20		38.1	15	42.5	17	73	30	74	29.2	40	15.7	45	17.3	14.1	31.1	4.7

Factory Pre-Charge: 30 PSI / 2 Bar

Maximum Working Pressure: 150 PSI / 10Bar (SPTB-003: 100 PSI)

Maximum Working Temperature: 150 ° F / 92 ° C



APEC PUMP ENTERPRISE CORP.

3F., No.394, Sec.2 Mingzhi Rd., Taishan Dist., New Taipei City 243, Taiwan.

TEL: +886-2-29034567 Fax: +886-2-29064567