

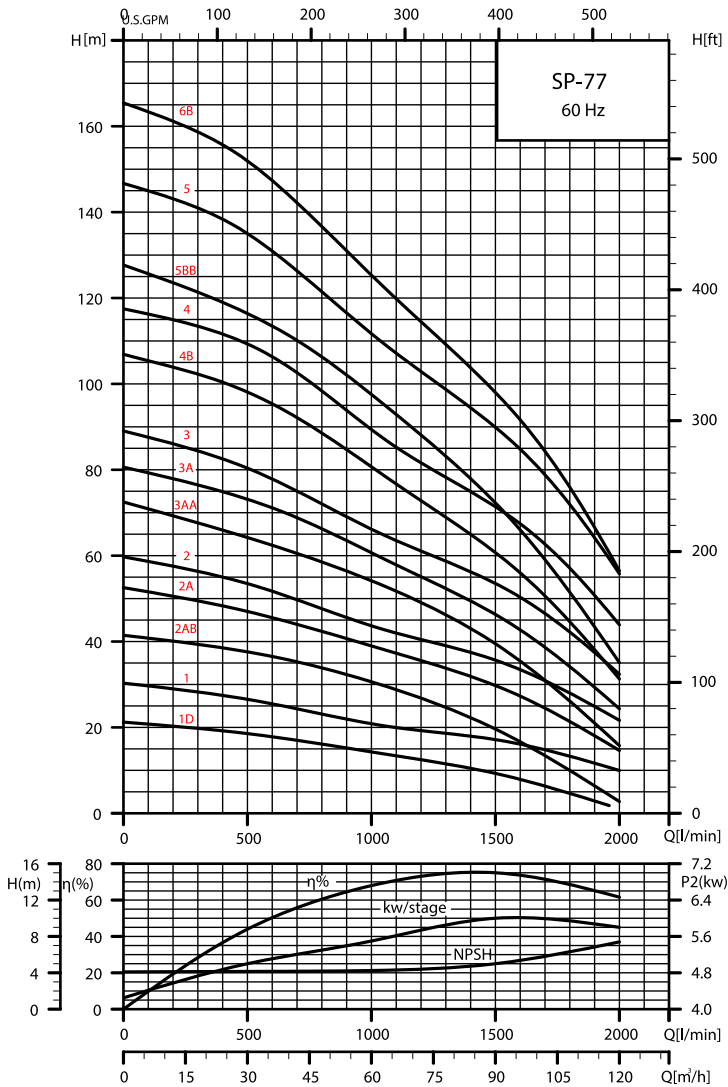


Curva de Rendimiento Bomba Sumergibles ACERO 8" SP-77

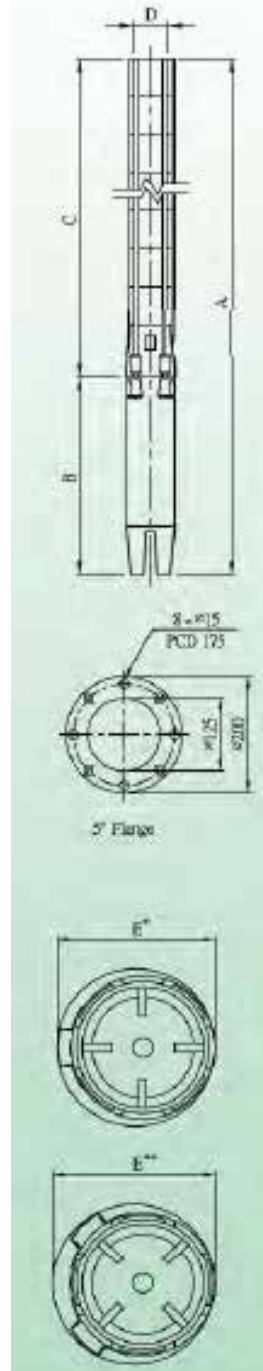

Pump Type	Motor P2		Max. current Amp		Q capacity 3450 rpm															
	KW	HP	230V	380V	HEAD IN METERS															
					m/h	18	24	30	36	42	48	60	72	84	96	108	120			
SP-77-1	5.5	7.5	24.6	15	300	28	27	26	25	24	23	21	19	18	16	13	10			
SP-77-2-BA	7.5	10	32.2	19.5	400	39	38	37	36	35	34	31	27	22	17	10	3			
SP-77-2A	9.3	12.5	42.3	25.6	500	49	48	47	46	44	42	39	36	32	27	21	15			
SP-77-2	11	15	47.4	28.6	600	56	55	54	52	50	47	44	40	37	33	28	22			
SP-77-3-AA	13	17.5	55	33.3	700	68	66	64	62	60	58	54	49	43	35	26	16			
SP-77-3-A	15	20	60.6	36.6	800	76	75	73	71	69	66	61	55	50	43	34	25			
SP-77-3	18.5	25	75	45	900	84	83	80	78	75	72	66	61	56	50	42	33			
SP-77-4-B	18.5	25	75	45	1000	102	100	98	95	92	88	80	73	65	56	45	32			
SP-77-4	22	30	90.4	54.7	1100	113	112	109	106	103	98	89	82	75	68	57	44			
SP-77-5-BB	22	30	90.4	54.7	1200	122	119	116	114	110	106	97	88	78	66	51	35			
SP-77-5	26	35	106.6	64.5	1300	141	138	135	131	126	121	112	103	95	85	72	56			
SP-77-6-B	30	40	124	75	1400	158	156	152	147	142	136	125	115	104	92	76	57			
SP-77-6	37	50	154	93	1500	169	166	162	157	151	146	134	124	114	101	86	67			
SP-77-7	37	50	154	93	1600	198	195	191	186	180	174	159	146	133	120	101	80			
SP-77-8	45	60	172	104	1700	231	228	225	220	213	204	187	172	159	141	121	98			
SP-77-9	55	75	214	130	1800	262	259	254	247	238	229	210	195	179	160	138	110			
SP-77-10	55	75	214	130	1900	290	287	281	274	265	255	235	217	199	178	152	123			
SP-77-11	63	85	266	161	2000	317	313	308	301	293	282	258	237	218	196	168	135			
SP-77-12	63	85	266	161	2100	347	342	337	330	319	307	280	259	238	215	183	147			
SP-77-13	75	100	284	172	2200	375	370	365	357	346	332	305	280	258	230	198	160			

Curva de Rendimiento Bomba Sumergibles ACERO 8" SP-77

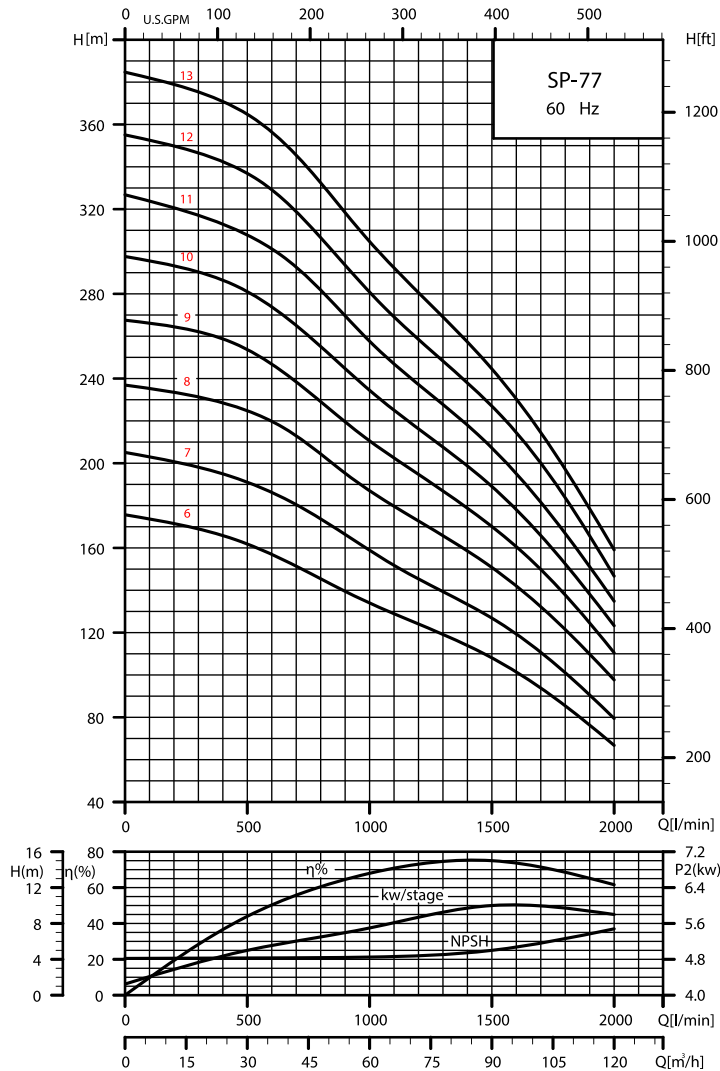

Pump Type	Dimensions(mm)										Net Weight (Kg)	
	3" Connection (RP,NPT)					5" Flange						
	A	B	C	E*	E**	A	B	C	E*	E**	Pump	Motor
SP-77-1	1232	614	618	178	186	1232	614	618	200	200	25.1	48
SP-77-2-BA	1392	646	746	178	186	1392	646	746	200	200	28.7	52
SP-77-2A	1457	711	746	178	186	1457	711	746	200	200	28.7	58
SP-77-2	1457	711	746	178	186	1457	711	746	200	200	28.7	58
SP-77-3-AA	1650	776	874	178	186	1650	776	874	200	200	32.3	64
SP-77-3-A	1650	776	874	178	186	1650	776	874	200	200	32.3	64
SP-77-3	1715	841	874	178	186	1715	841	874	200	200	32.3	70
SP-77-4-B	1844	841	1003	178	186	1844	841	1003	200	200	35.9	70
SP-77-4	1909	906	1003	178	186	1909	906	1003	200	200	35.9	76
SP-77-5-BB	2037	906	1131	178	186	2037	906	1131	200	200	39.5	76
SP-77-5	2167	1036	1131	178	186	2167	1036	1131	200	200	39.5	92
SP-77-6-B	2295	1036	1259	178	186	2295	1036	1259	200	200	43	92
SP-77-6	2664	1405	1259	178	186	2664	1405	1259	200	200	43	136
SP-77-7	2792	1405	1387	178	186	2792	1405	1387	200	200	46.6	136
SP-77-8	2589	1062	1527	200	204	2589	1062	1527	205	205	51.6	175
SP-77-9	2859	1204	1655	200	204	2859	1204	1655	205	205	55.2	193
SP-77-10	2987	1204	1783	200	204	2987	1204	1783	205	205	58.8	193
SP-77-11	3544	1633	1911	200	204	3544	1633	1911	205	205	62.4	249
SP-77-12	3672	1633	2039	200	204	3672	1633	2039	205	205	66	249
SP-77-13	3562	1394	2168	200	204	3562	1394	2168	205	205	69.6	213

E*: Maximum diameter of pump with one motor cable

E**: Maximum diameter of pump with two motor cable