


## Curva de Rendimiento Bomba Sumergibles ACERO 4" SP-18

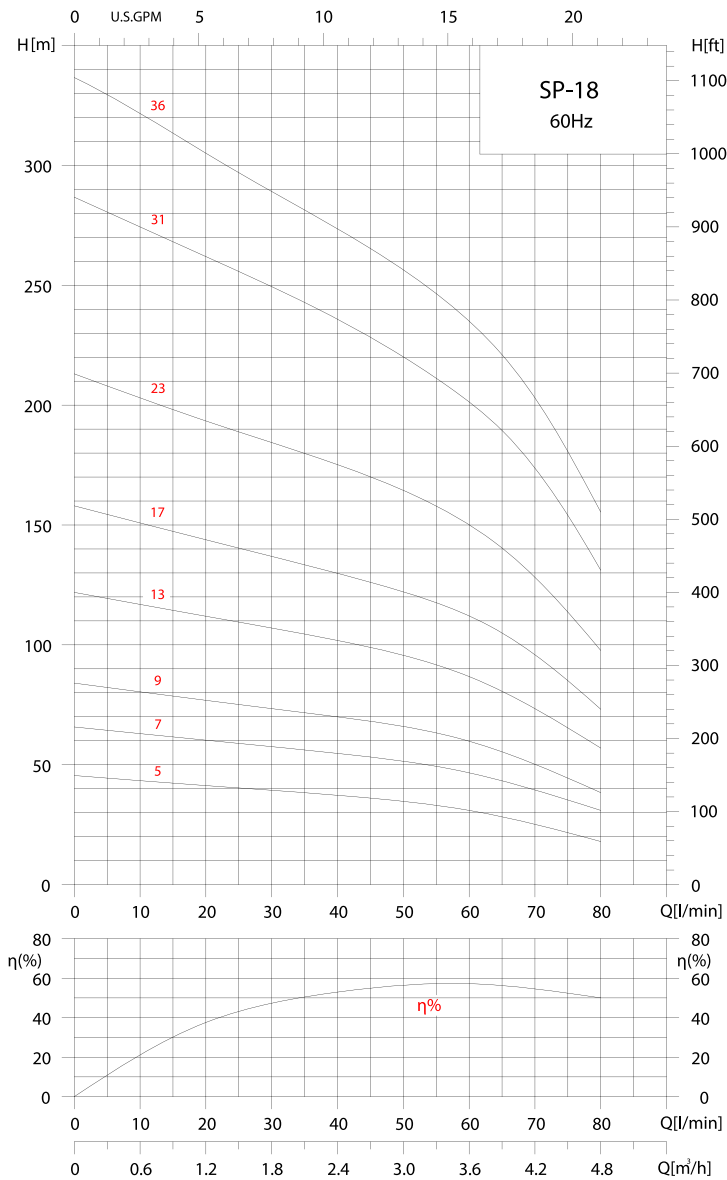

MODEL	STAGES	KW	HP	Q=DELIVERY														PUMP END								
				1/min	5	10	15	20	25	30	35	40	50	60	70	80	DIMENSION (mm)	WEIGHT (kg)	Dimensions With motor							
				m <sup>3</sup> /h	0.3	0.6	0.9	1.2	1.5	1.8	2.1	2.4	3	3.6	4.2	4.8			(mm) 1x230V	(mm) 3x230V						
				H=TOTAL HEAD IN METRES																						
SP-1805	5	0.37	1/2	45													39	38	36	32	26	17	260	2.3	515	515
SP-1807	7	0.55	3/4	63													54	53	51	45	37	24	302	2.7	589	589
SP-1809	9	0.75	1	81													70	68	65	58	47	30	344	3.1	774	662
SP-1813	13	1.1	1 1/2	117													102	99	94	83	68	43	428	3.9	662	746
SP-1817	17	1.5	2	153													133	129	123	108	89	57	512	4.7	896	858
SP-1823	23	2.2	3	207													180	175	166	147	120	77	638	5.9	1234	1162
SP-1836	36	3.7	5	324													282	274	259	230	189	120	956	8.5	1705	1552